

产品特性/Product Features

- IP6K9K
- 600A 85°C长时间载流能力
- 12-750VDC
- 1000MΩ (1000VDC) , IEC60664-1
- PCB

1a	
	≤0.5mΩ (at 600A)
	600A
	2×10 ⁵
	1000VDC
	3000A(320VDC)1
	600kW
1)	5×10 ⁴ 750VDC, 120A, 0.6s :5.4s
	1×10 ⁵ 800VDC,10A
	1×10 ⁴ 800VDC,100A
	2×10 ³ 750VDC,300A
	500 750VDC,600A
	5×10 ³ 750VDC,-100A
	1×10 ³ 750VDC,-300A
	300 750VDC,-600A
	1 800VDC,2500A
	100 1000VDC,600A
2)	600A:
	800A:20min
	1000A:5min
	3000A:4s
	8000A:10ms

1) 23°C, 0.05s:20s,

2) 85°C, 200 mm²,
3) 8000A 10ms




		1000MΩ(1000VDC)
		3000VAC 1min
		3000VAC 1min
()		≤50ms
()		≤30ms
		196m/s ²
		490m/s ²
		10Hz ~ 500Hz 49m/s ²
		5% ~ 85%RH
		-40°C ~ 85°C
		M10
		1850g
		146mm×66.6mm×132.8mm

VDC	VDC	VDC	保持时	W
12	9	1~9	保持时	50(0.2s) 10
24	≤18	2~18	保持时	50(0.2s) 10

-40°C ~ 85°C)

规格书

/Unit mm

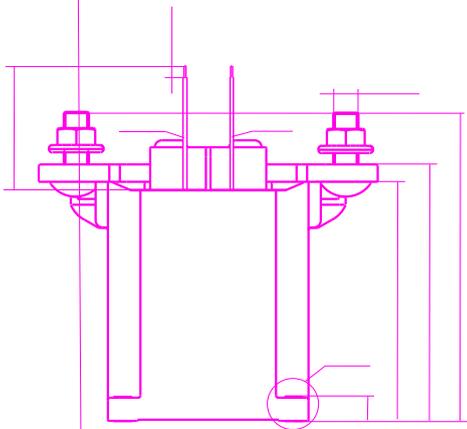

:

±0.5mm

50mm

10mm ±0.3mm
±0.8mm

10 50 mm

