

产品特性/Product Features

- IP6K9K
- 30A 85°C
- 12-750VDC
- 1000MΩ (1000VDC) , IEC 60664-1
-

触点参数 / Contact parameters

		450V型		750V型	
		1a			
		≤5m (at 30A)			
		30A			
		2×10 ⁵			
		1000VDC		1000VDC	
		300A(320VDC)1		300A(320VDC)1	
		13.5kW		22.5kW	
1)		2×10 ⁴	450VDC, 30A	1×10 ⁴	750VDC, 30A
		7.5×10 ⁴	450VDC, 30A	7.5×10 ⁴	450VDC, 30A
2)	30A:				
	60A:60min				
	80A:20min				
	160A:30s				
	300A:0.6S				
1		23°C	0.6s	5.4s	
2	85°C	10mm ²	"	"	

性能参数 / Performance parameters

		1000MΩ(1000VDC)
		3000VAC 1min
		3000VAC 1min
()		≤30ms
()		≤10ms
		196m/s ²
		490m/s ²
		10Hz ~ 500Hz 49m/s ²
		5% ~ 85%RH
		-40°C ~ 85°C
		4M
		130g
		53.7mm×36.2mm×39.5mm

线圈参数 / Coil parameters

12	9	1.2	3.6W
24	18	2.4	3.8W

-40°C ~ 85°C)


外形图、安装孔尺寸 / Outline drawing, mounting hole size

/Unit mm




安装孔尺寸 / 接线图 Mounting hole size/Wiring diagram

Mounting hole size

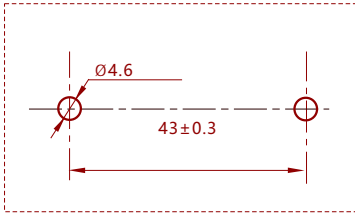


Wiring diagram




性能曲线图 Performance graph

Electrical life curve

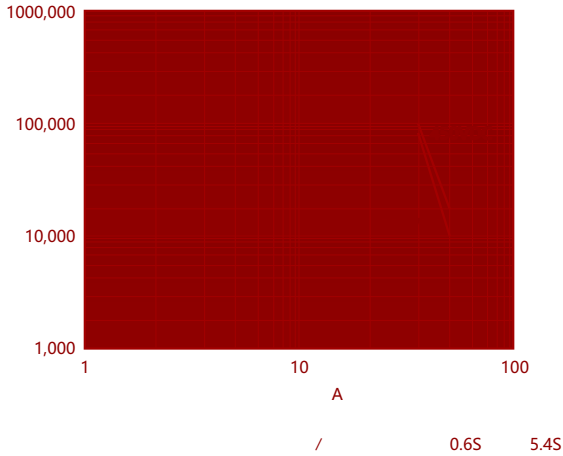

Tolerance curve

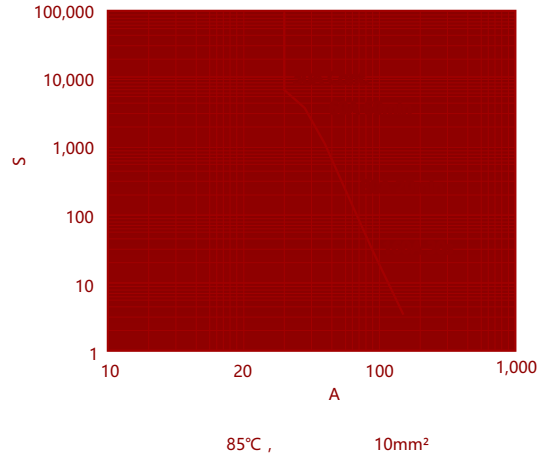

使用注意事项 Precautions for use

1

M4	1.8N·m 2.7N·m	04.0~04.5mm	3mm	M4螺钉	1.8N·m~2.7N m
----	---------------	-------------	-----	------	---------------

2

10mm²

3

3mm



声明/Statement: